

Eye Refract

Binocular physiological
refraction
New web app





Eye Refract: the reforged refraction process

Discover the Visionix Eye Refract, a refractive device designed to deliver unparalleled precision in record time. With its advanced features and cutting-edge technology, this device provides accurate prescriptions in just three minutes, while optimizing the patient journey and improving the efficiency of your practice. And with its **brand-new web application**, patient data management is now simplified, allowing you to track results in real-time and enhance patient interactions. The Visionix Eye Refract is the ideal solution for eye care professionals who seek to combine performance, speed, and comfort.

A much simpler refraction

STANDARD REFRACTION



Step 1: Objective refraction

ARK based objective refraction comes with limitations:

- monocular measurement,
- no accommodation control
- restricted field



Step 2: Subjective refraction

- More stressful for the patient
- Time consuming
- Operator and patient dependant

EYE REFRACT REFRACTION


Physiological refraction

Wavefront based refraction offers:

- binocularity during the entire process
- physiological reaction monitoring
- openfield condition
- accommodation control system
- auto-adjusting lenses



Physiological spontaneous reaction



Binocular aberrometric measurement



Translated into lenses



Final prescription

The operator finds the most comfortable prescription through a few additional comparative questions.



Average processing time: 10 minutes



Average processing time: 4 minutes

The reforged refraction process

Eye Refract, manufactured by Visionix, is the only Advanced Algorithm for Refractive Calculation powered device that offers physiological refraction to determine the most comfortable prescription for your patients.



PHYSIOLOGICAL REFRACTION

The only device with live measurements and automatic lenses rotation.

Physiological refraction is an adaptive process that takes the patient's physiological reaction into account until a stable measurement is reached. Powered by Visionix Wavefront technology, measurements are performed simultaneously on both eyes.



QUICK PRO ALGORITHM

Following the physiological refraction process, the Eye Refract Quick Pro algorithm enables the system to find the most comfortable prescription as quickly as an experienced optometrist.


The Eye Refract algorithm was designed by:

- Analyzing thousands of subjective refractions cases
- Comparing results from the Eye Refract with standard subjective refractions
- Involving professors in optometry and experienced optometrists

Speed up your process

Cut your examination time without sacrificing accurate results*.

THE MOST COMFORTABLE PRESCRIPTION IN LESS THAN 4 MINUTES

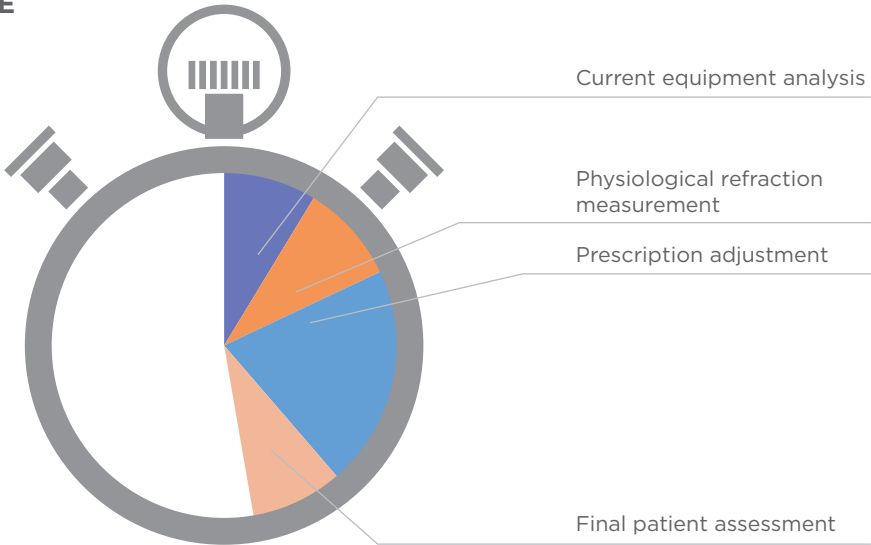

ALL-IN-ONE DEVICE

The Eye Refract solution combines a lensmeter, a binocular wavefront ARK and a phoropter all in one device. Patients no longer need to move from one device to another. Patients are more comfortable and you save time setting up and disinfecting devices.

How would you use the time you save?



* Comparison Between Aberrometry-Based Binocular Refraction and Subjective Refraction
Gonzalo Carracedo 1,2, Carlos Carpena-Torres 1, Maria Serramito 1, Laura Batres-Valderas 1

Delegate refraction data collection with confidence

Advanced Algorithm for Refractive Calculation embedded in the Eye Refract solution guides any staff member through the refraction process- even one with limited training. Quick Pro steps ensure any operator delivers consistent results.

Results are based on the patient's physiological reactions, which require no operator interpretation, making them easily repeatable.

The final prescription data is sent to the eye care professional for confirmation and sign off.

FULL DELEGATION

Eye care professional reviews the refraction data collected by the technician using Eye Refract from another room or location.



HALF DELEGATION


The technician conducts the refraction process on the Eye Refract solution, allowing doctor to perform additional tests if necessary.



COMPLETE MANAGEMENT ON SITE OR REMOTE REFRACTION SOLUTION*

Complete management of the eye exam by a single eye care professional in store or remotely results in time savings and efficiency.

***SEE OUR REMOTE REFRACTION SOLUTION PAGE 10**

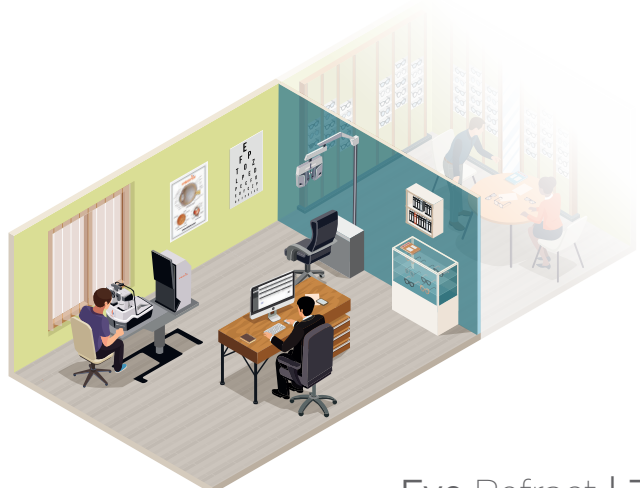

Improve the patient experience

The only device automatically providing patients with a smooth transition from blurry vision to clear vision in seconds. The prescription is quickly determined, minimizing minimizing uncertain results and relieving patient stress. Once the physiological refraction is found, Eye Refract automatically determines the most comfortable prescription. Additionally, social distancing is possible with the tablet driven device, avoiding proximity between patients and operators.




EXPERIENCE A NATURAL MEASUREMENT

By measuring both eyes simultaneously, Visionix Eye Refract integrates the way patients use their eyes innately. The lenses automatically adjust to the patient's visual reaction, ensuring the physiological refraction is reached very quickly.

ELIMINATE STRESS

Eye Refract does the work of multiple devices, eliminating patient stress of moving to different instruments and having to answer multiple questions.

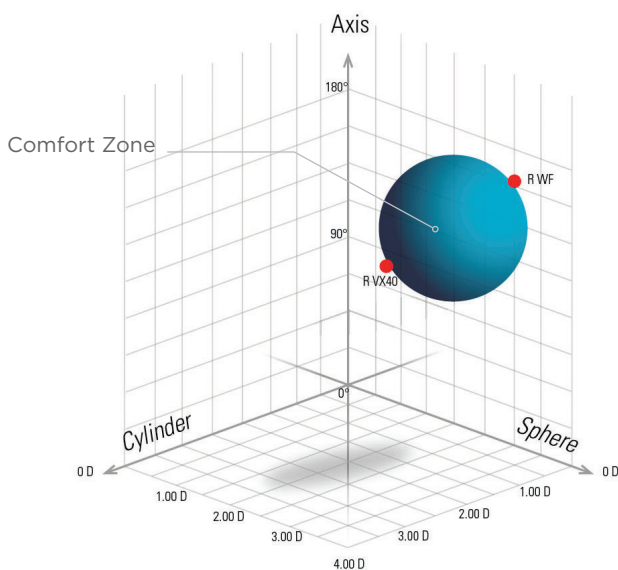

REACH THE COMFORT ZONE

Based on the results of physiological refraction, the patient's most comfortable prescription is determined using a few fine-tuning questions.

A more efficient experience for you

Compared to conventional devices, Eye Refract is more comfortable for the operator, giving more confidence and less stress.



Manual Refraction



Automated Digital Refraction



Visionix pioneering binocular physiological refraction



CLASSIC REFRACTION

The non-ergonomic refraction solution of manual phoropters compels eye care professionals to assume unnatural postures for device manipulation, which can lead to painful strain on the neck and shoulders.

TRANSITION TO AN ERGONOMIC AND DIGITAL REFRACTION

Switching to digital refraction can reduce the strain on the neck and shoulders; and eliminates the need to reach forward and above the midline while changing lenses.

EYE REFRACT: THE NEW STANDARD

The ergonomic, intuitive and responsive user interface allows eye care professionals to smoothly perform refractions.


- Powered by Advanced Algorithm for Refractive Calculation, the binocular physiological refraction device includes instructions at each step, automatic lens adjustment and alert messages in case of illogical answers
- Take back control at any point to make adjustments using a wide range of complementary tests.

Easily Manage the Refraction Process Remotely



Eye Refract can be operated remotely so you can easily perform the refraction from anywhere and have a live discussion with your patients. Visionix Nexus supports this solution as the platform is designed for the secure exchange and storage of anonymized and encrypted consumers data within the eye care industry.

In the absence of an optometrist in-store, the remote refraction solution allows you to pool our optometrists, utilize an external platform, or adopt a hybrid approach to address this potential absence and ensure a high-quality service for your customers.

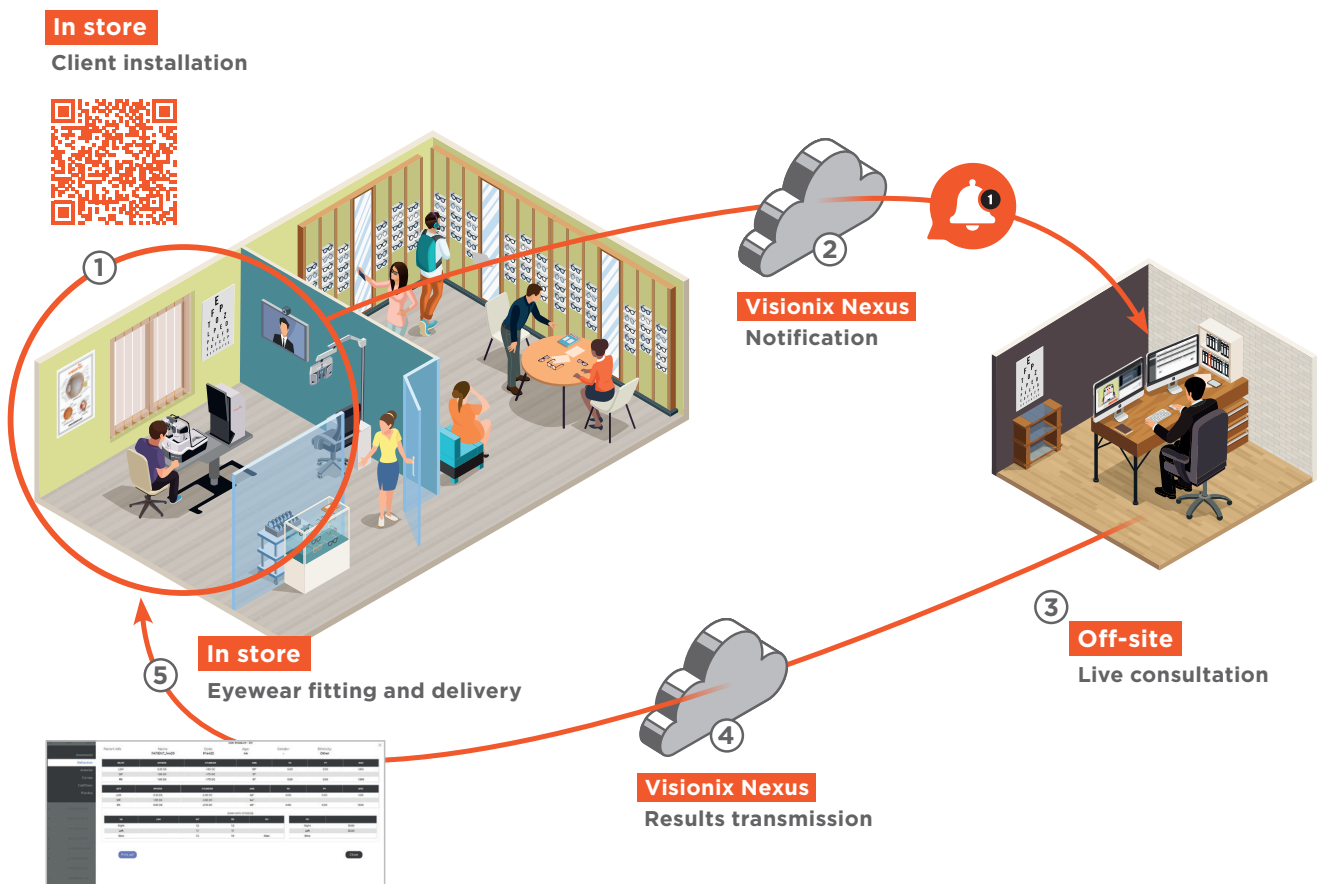

VISIONIX NEXUS

Our remote refraction solution is powered by the Visionix Nexus, a data exchange platform for eye care providers, supporting asynchronous and synchronous telehealth solutions, remote refraction. It allows live interactions between optometrists, ophthalmologists, patients, and in-store operators. Visionix Nexus enables teleconsultation and examination.

6 pages comprehensive report
 (anamnesis - refraction - anterior - cornea - glaucoma / cataract - fundus)

The screenshots display the following information:

- Client Information:** Name, Sex, Birth date, Ethnicity, Customer ID.
- ANAMNESIS (PROBING QUESTIONS):** A list of questions related to vision, eye health, and general health, with checkboxes for 'Yes' or 'No'.
- REFRACTION:**




| RIGHT | SPH/CR | CYL/AXIS | ADD | PK | PT | PD | ACCD | LEFT | SPH/CR | CYL/AXIS | ADD | PK | PT | PD | ACCD |
|-------|---------|----------|------|------|------|-------|------|------|---------|----------|------|------|------|-------|------|
| RIGHT | 0.00 DS | -0.75 DC | 0.00 | 0.00 | 0.00 | 13.00 | 0.00 | LEFT | 0.00 DS | -0.75 DC | 0.00 | 0.00 | 0.00 | 13.00 | 0.00 |
| AX | 0.00 DS | 0.00 DC | 0.00 | 0.00 | 0.00 | 13.00 | 0.00 | AX | 0.00 DS | 0.00 DC | 0.00 | 0.00 | 0.00 | 13.00 | 0.00 |
- Anterior Segment:** Photos of the right and left eyes, labeled 'ANTERIOR'.
- Cornea:** Topography maps for SIA, SCA, and TANGENTIAL for both eyes, with associated data like ETC, SCA, and SCUR.
- Fundus:** Photos of the right and left fundus, labeled 'FUNDUS'.
- Referring Doctor Findings:** A section with a signature and the text 'This data collection service does not constitute a diagnosis...'.


COMPREHENSIVE EYE EXAM


This system enables remote operation, allowing you to conduct refraction and screening conveniently from any location while engaging in live discussions with your patients. Visionix Nexus endorses this capability, as the platform is tailored to ensure the secure exchange and storage of anonymized and encrypted consumer data within the eye care sector.



Configuration with VX 25

| EYE REFRACT | |
|------------------------------------|---|
| Ref. | 30230000-10 |
| Output | <ul style="list-style-type: none"> • RS-232 / USB2.0 / VGA / LAN • Embedded bluetooth / Wifi |
| Hardware | Tablet Android Chinrest Electrical Near Vision Target 250-700mm, Mini tablet 7" Head Autofocus, autocentering |
| Range | Sph -30.00D to +27.25D Sph step 0.125 / 0.25D Cyl -8.00 to +8.00D Cyl step 0.25 / 0.50 / 1D Optical axis 0 to 180° Axis step 1° / 5° / 10° / 45° Prisms 0 to 20D Prims steps 0.25D Kerato 6mm-9mm (37.5D-56D) |
| Communication |   Remote Refraction (optional) |
| | Shack Hartmann Camera Each of the 1050 points = one measure |
| Compliance: | Class IIa Medical Device CE certified by Notified Body IMQ (number:0051)  |
| Manufacturer : | Luneau Technology Operations : 2 rue Roger Bonnet, 27340 Pont-de-l'Arche, France |
| Table VX 40-ER VX 25-ER | 8160-0025-01 |

| VX 40 | |
|---------------------------|---|
| Ref. | 3014-0000-00 |
| Measurable range | Number of analyzed points:.... Up to 1350 Sphere power: -15 ~ +10D (step 0.01, 0.06, 0.125, 0.25D) Cylinder power:..... 0 ~ 10D (step 0.01, 0.06, 0.125, 0.25D) Cylinder axis:..... 0 ~ 180° (step 1°) Addition power:..... 0 ~ 33.5D (step 0.01, 0.06, 0.125, 0.25D) Prism power:..... 0 ~ 310 Δ (step 0.01 Δ) PD measurement:..... Mono / Bino Cylinder:..... -, + |
| General | Printer Internal Screen LCD/16M colours, 7" Light source LED - 730nm Working conditions 10 to 40°C Data output RS-232, Bluetooth |
| Console | 8160-8025-00 |
| Compliance | <ul style="list-style-type: none"> • Class I Medical Device CE marked according to EU MDR 2017/745  |
| Legal Manufacturer | <ul style="list-style-type: none"> • Luneau Technology Operations : 2 rue Roger Bonnet, 27340 Pont-de-l'Arche, France |

| VX 25 | |
|---------------------------|---|
| Ref. | 8225-0000-00 |
| Measurable range | <ul style="list-style-type: none"> • Screen type LCD 1920x1200 pixels • Size 7" LCD (color) High resolution Monitor • Maximum contrast 1000/1 • Luminance 250 cd/m² • Reading distance 5 meters • Visual acuity range 0.1 to 2.0 - 20/500 to 20/10 • VX 25 power supply 100-240V CA - 50/60Hz - 1.3A • Screen power supply 12V DC • Consumption Max 60W • Protection against electric shocks Class 1 • IP Classification IPX0 • Size 315mm (length) x 660mm (height) x 320mm (width) • Weight 28kg • Connections with phoroptors RS232-C or IR or wifi • Sound output Sound output jack 3.5mm |
| Compliance | <ul style="list-style-type: none"> • Class I Medical Device CE marked according to EU MDR 2017/745  |
| Legal Manufacturer | <ul style="list-style-type: none"> • Luneau Technology Operations : 2 rue Roger Bonnet, 27340 Pont-de-l'Arche, France |




SPACE SAVING CONFIGURATION WITH VISIONIX VX 25

This screen has been designed for optimal results in the pre-screening area thanks to its ergonomic design, streamlined style, and the large number of tests included.



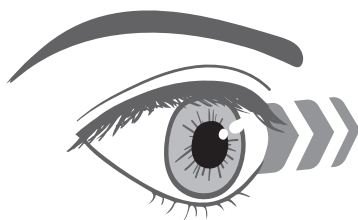


The VX 25 includes the same functions as the VX 22, but within a smaller footprint.

Projection distance: 5 meters.
Footprint 1m²



Working distance: 0.8 meters


Configuration with VX 22

| | | | |
|-------------------------------------|--|------------------------------|--|
| EYE REFRACT | | VX 40 | |
| Ref. | 30230000-10 | Ref. | 3014-0000-00 |
| Output | <ul style="list-style-type: none"> • RS-232 / USB2.0 / VGA / LAN • Embedded bluetooth / Wifi | Number | of analyzed points:.... Up to 1350 |
| Hardware | Tablet Android Chinrest..... Electrical Near Vision Target..... 250-700mm, Mini tablet 7" Head..... Autofocus, autocentering | Sphere power: | -15 ~ +10D (step 0.01, 0.06, 0.125, 0.25D) |
| Range | Sph..... -30.00D to +27.25D Sph step..... 0.125 / 0.25D Cyl..... -8.00 to +8.00D Cyl step..... 0.25 / 0.50 / 1D Optical axis..... 0 to 180° Axis step..... 1° / 5° / 10° / 45° Prisms 0 to 20D Prims steps..... 0.25D Kerato 6mm-9mm (37.5D-56D) | Cylinder power: | 0 - 10D (step 0.01, 0.06, 0.125, 0.25D) |
| Communication |   Remote Refraction (optional) | Measurable range | Cylinder axis:..... 0 - 180° (step 1°) Addition power:..... 0 - 33.5D (step 0.01, 0.06, 0.125, 0.25D) Prism power:..... 0 - 310 Δ (step 0.01 Δ) PD measurement:..... Mono / Bino Cylinder:..... -, + |
| | Shack Hartmann Camera Each of the 1050 points = one measure | General | Printer Internal Screen..... LCD/16M colours, 7" Light source LED - 730nm Working conditions..... 10 to 40°C Data output RS-232, Bluetooth |
| Compliance: | Class IIa Medical Device CE certified by Notified Body IMQ (number:0051)  | Console | • 8160-8025-00 |
| Manufacturer : | Luneau Technology Operations : 2 rue Roger Bonnet, 27340 Pont-de-l'Arche, France | Compliance | • Class I Medical Device CE marked according to EU MDR 2017/745  |
| Table VX 40-ER VX 25-ER | 8160-0025-01 | Legal Manufacturer | • Luneau Technology Operations : 2 rue Roger Bonnet, 27340 Pont-de-l'Arche, France |
| VX 22 Linear polarisation LP | | | |
| Ref. | 8241-0022-40 | | |
| Measurable range | <ul style="list-style-type: none"> • Screen size 23.6 inch • Resolution..... 1920x1080 • Luminance 250 Cd/m2 • Reading distance 2 to 8 meters (78 to 315 inch) • Visual acuity..... 0,1 to 2,0 • Power supply..... 100-240V CA - 50/60Hz - 1.3A • Built-in speaker • Interface RS-232, IR, 4 Usb, VGA, Hdmi, Lan • Built-in LED for external fixation point • Possible media support for advertising purposes : ASF, WMV, WMA, OGG, MOV, RM, RA, RAM, MP4, MPEG, AVI, VOB, MPG | | |
| Stands and Mounts | <ul style="list-style-type: none"> • 7191013 Floor stand (Optional) • 7610022 Table stand (Optional) • 8230-5041-07 VESA wall mount (included) | | |
| Accessories | <ul style="list-style-type: none"> • Batteries for remote control dongle • USB stick • Radio remote control • Power supply cable and transformer • Matching tests for child tests • Red / green frame • Circular polarised frame | | |
| Compliance | • Class I Medical Device CE marked according to EU MDR 2017/745  | | |
| Legal Manufacturer | • Luneau Technology Operations : 2 rue Roger Bonnet, 27340 Pont-de-l'Arche, France | | |




STANDARD SPACE CONFIGURATION WITH VISIONIX VX 22 LP CHART DISPLAY

This device features a linear polarisation to test binocular and stereoscopic vision, allowing a perfect dissociation of the right eye and left eye. This streamlines testing, allowing for quick examination of bi-ocular, binocular, and stereoscopic vision in one process.

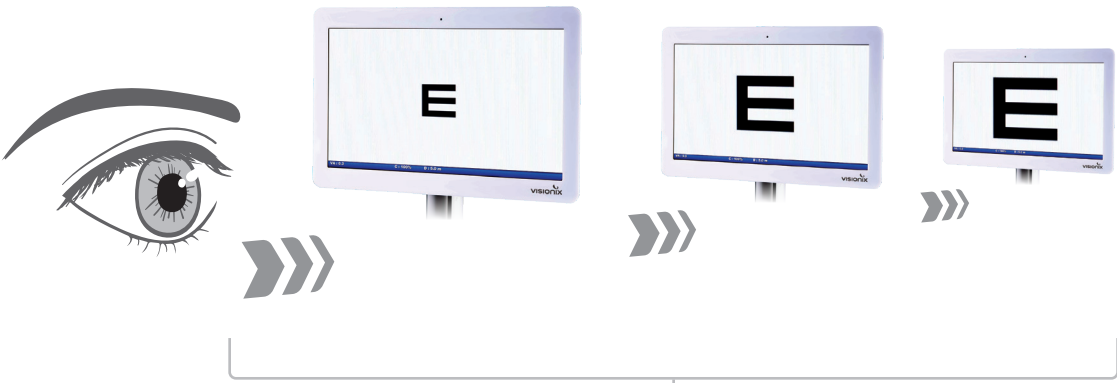

Projection distance 2 to 8 meters.

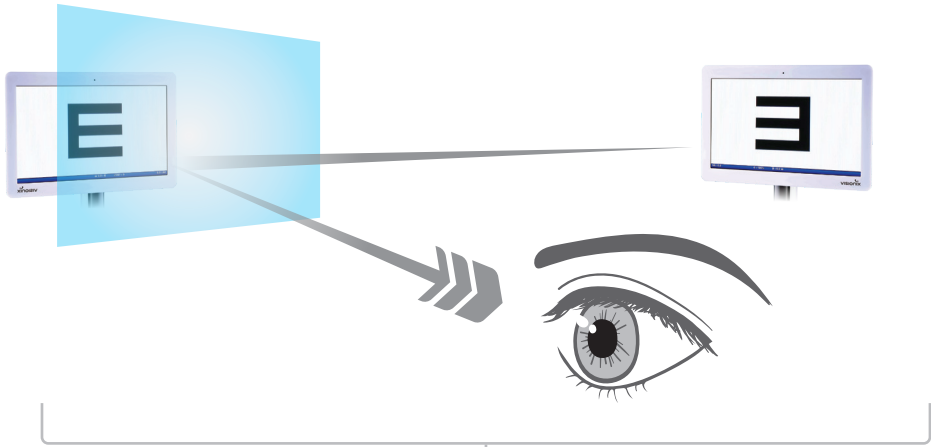

Features mirror mode



INNOVATION TO UNLOCK YOUR POTENTIAL

VISIONIX INTERNATIONAL SAS

2 Rue Roger Bonnet, 27340 Pont-de-l'Arche - France

Tél. + 33 232 989 132 - Fax + 33 235 020 294

contact@visionix.com

www.visionix.com